



# HF-Selectalume II for TL5 lamps

HF-S 254 TL5 II 220-240V 50/60Hz

HF-Selectalume II is the most cost-effective, reliable, slim and affordable fluorescent solution, with highly disruptive technology for energy saving, system flexibility and unsurpassed performance. The cost-saving HF-Selectalume II has a robust design which meets all relevant international safety and performance standards. HF-Selectalume II is intended for use with indoor lighting fixtures such as spotlights, downlights and recessed luminaires, which are largely used in office, retail, industry, hotel, restaurant and other applications.

## Product data

### • General Characteristics

Application code	II
Rated Lamptype	TL5
Rated Number of Lamps	2 piece
Rated Ballast-Lamp Power	54
Line Voltage	220-240 V
Line Frequency	50/60 Hz
Housing	L 280x30x21
Energy Efficiency Index	A2
Lifetime 90% surv.@Tcaselife	50000 hr

### • Operating Characteristics

Automatic restart	Yes
Preheat time	1.6 s
Operating frequency *	40-60 kHz
Mains voltage safety (AC)	198-264V -10%/+10%
Mains voltage performance (AC)	202-254V -8%/+6%
Inrush current Peak	28 (max) A
Inrush current Width	0.38 ms
Earth leakage current	0.5 (max) mA
Power losses gear	13.7 W
Ballast Lumen Factor	0.99 -
PowerFactor 100% output power	0.99 -
Overvoltage protection 320Vac	48 hr
Overvoltage protection 350Vac	2 hr
Crestfactor	1.7 -

Hum and Noise level < 30 dB(A)

### • Wiring Characteristics

Cable-Cap output-wires mutual	200 (max) pF
Conn.type input terminals	WAGO 744 connector
Conn.type output terminals	WAGO 744 connector [Suitable for manual wiring]
Max. cable length	0.75 m
Hot Wires	
Striplength	8.0-9.0 mm
Dual fixture Master/Slave	Possible, lamp wires 2m max. length [Master/Slave operation possible]
Wcs Input terminals	0.50-1.50 mm <sup>2</sup>
Wcs Output terminals	0.50-1.50 mm <sup>2</sup>
Cable-Cap hot output-wires-earth	200 (max) pF
Cable-Cap cold output-wires-earth	200 (max) pF

### • System Chars on driver level

Rated Lamp Power on TL5	54
System Power on TL5	110.9
Lamp Power on TL5	97.2
Power Loss on TL5	13.7

### • Temperature Characteristics

F-marking	Yes
T-case life	75 C
T-case maximum	75 (max) C

**PHILIPS**

# HF-Selectalume II for TL5 lamps

T-ambient	-15 (min), 50 (max) C
T-storage	-40 (min), 80 (max) C

Vibrations	IEC 68-2-6 Fc
Bumps	IEC 68-2-29 Eb (10G/16ms)
Approval marks	CE / CCC / ENEC / VDE-EMV
CE marking	Yes
ENEC certificate	Yes
C-Tick certificate	Yes
CCC certificate	Yes
PSB certification	Yes
TISI marking	Yes
SIRIM approval	Yes
CB Certificate	Yes

## • Emergency Characteristics

Bal Lm Fac Emer- gency operation	0.7 -
Light output after 5 sec	50% of EBLF
Light output after 60 sec	100% of EBLF
Normal operating voltage (DC)	220-240 V
Batt volt guaranteed ignition	186-275 V
Batt volt guaranteed operation	176-275 V

## • Product Dimensions

Length A1	360.0 mm
Fixing Hole Distance	350.0 mm
Length A2	
Width B1	30.0 mm
Height C1	21.5 mm
Fixing Hole Diameter	4.1 mm
D1	




## • Approval & Application Chars

EMI 9kHz .. 30 MHz	EN 55015
--------------------	----------

## • Product Data

Order code	913713033766
Full product code	913713033766
Full product name	HF-S 254 TL5 II 220-240V 50/60Hz
Order product name	HF-S 254 TL5 II 220-240V 50/60Hz
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500999382
Bar code on outerbox - EAN3	8727900905625
Logistic code(s) - 12NC	913713033766
Net weight per piece	0.225 kg

## Dimensional drawing

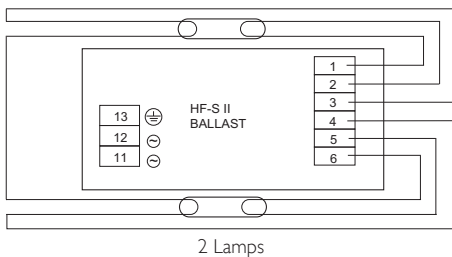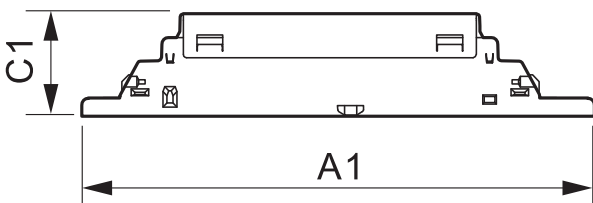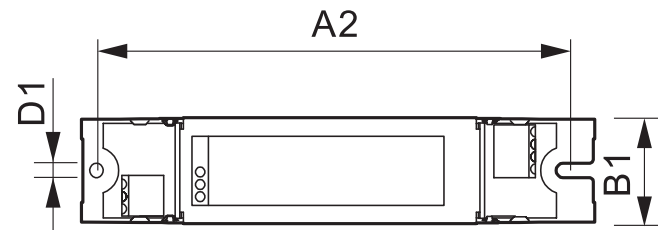

## HF-S 254 TL5 II 220-240V 50/60Hz

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	C1 (Norm)	D1 (Norm)
HF-S 254 TL5 II 220-240V 50/60Hz	360.0	350.0	30.0	21.5	4.1